

NEW
PRODUCT!

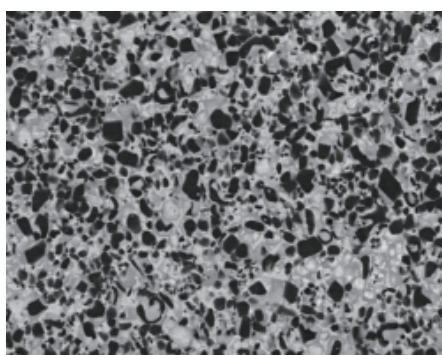
AT202 Cermet inserts



New Turning Cermet Inserts

Wide application range, offer strong toughness and longer tool life

• Features



High stability

The hot hardness and thermal shock resistance are greatly improved through the cladding of fine grain hard particles and multi-component poly-crystal carbides by controlling the core-rim structure. Therefore, stable tool life can be obtained under severe cutting conditions.

Excellent cutting performance

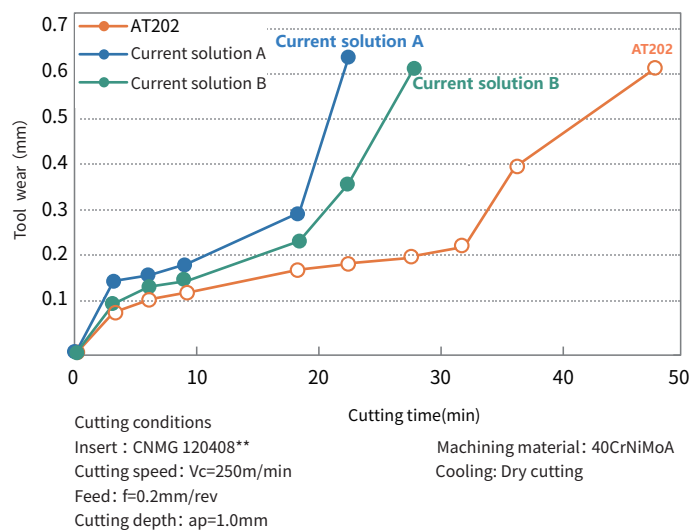
Unique design of binders to improve the hot hardness and wettability between hard particles and various binders. Edge chipping is minimized to realize excellent cutting performance.

• Application range and cutting conditons

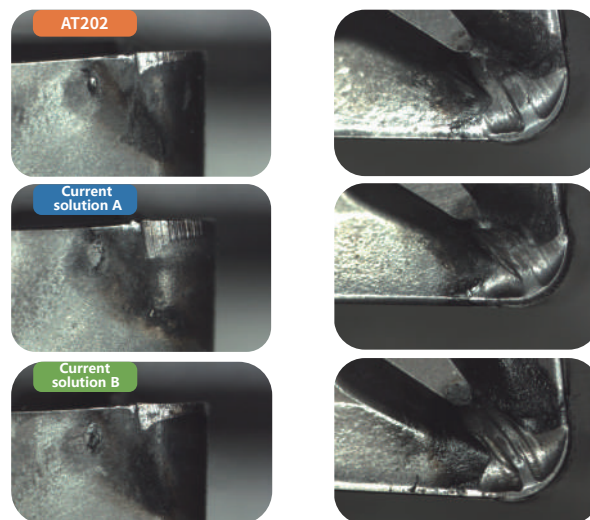
Machining materials	Steel (Carbon steel / Alloy steel)					Cast iron				
Cutting field	Finishing Machining ← → Rough Machining					Finishing Machining ← → Rough Machining				
ISO classification	P01	P10	P20	P30	P40	K01	K10	K20	K30	K40
Cermet		AT200					AT200			
		AT202					AT202			

Workpiece materials		Hardness	Cutting speed (m/min)
P	CARBON STEELS 1018, 1040, 1080, 1090.....	HB ≤ 180	150-300
	ALLOY STEELS 4140, 4150, 4320.....	HB ≥ 180	120-260

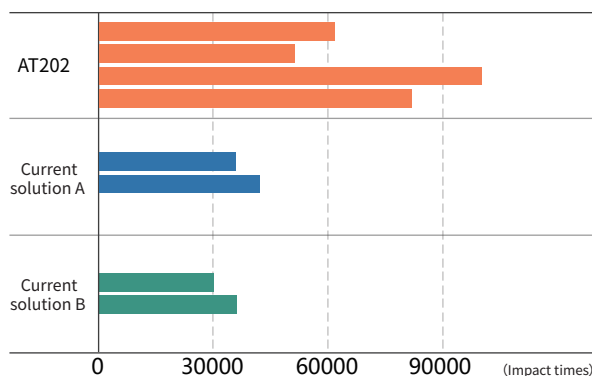
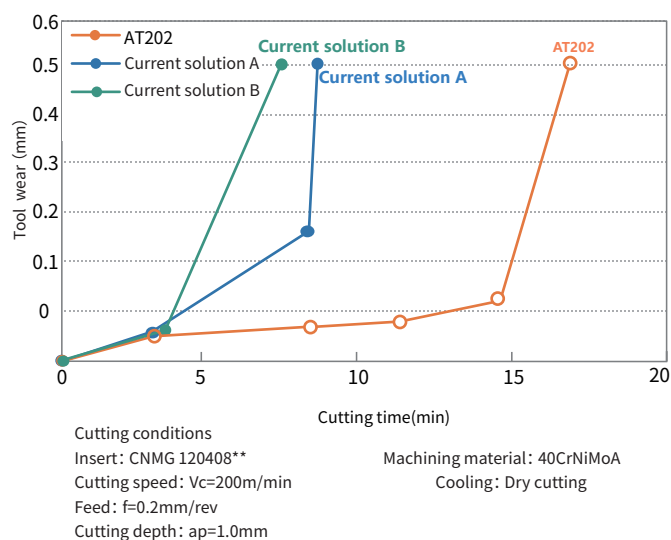
Wear resistance comparison



Cutting time **18.4** minutes comparison

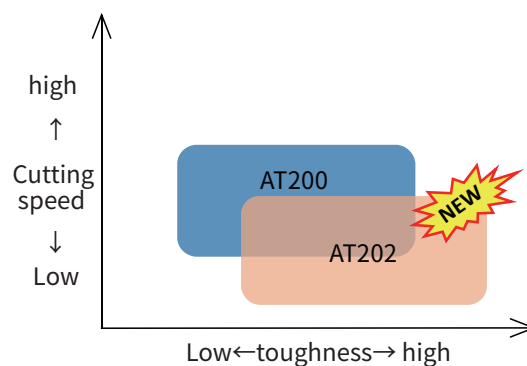


Edge breakage comparison

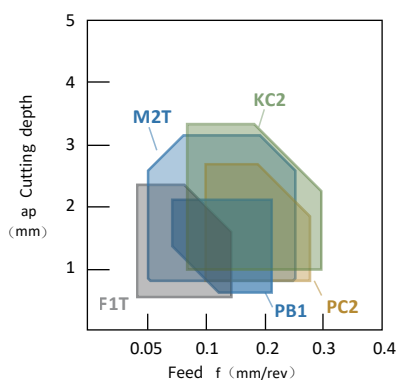
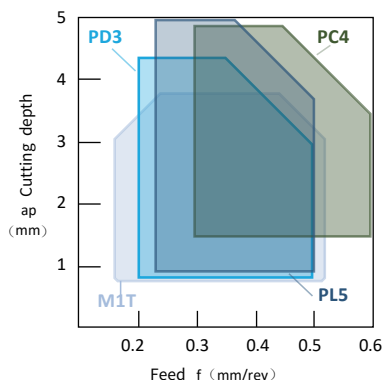
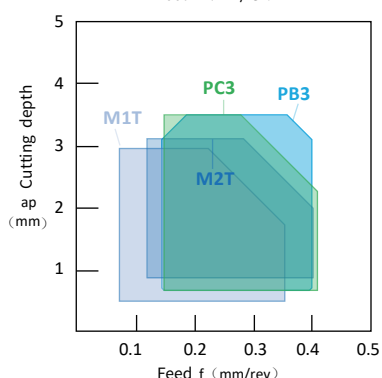
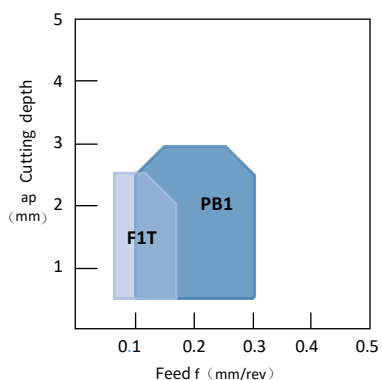


Grade and application range

	Continuous machining	general machining	light interrupt machining
Steel	AT200 AT202		




◆ Chip breakers-Negative




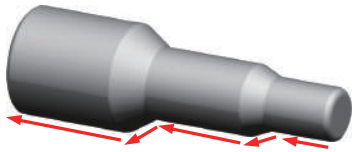

Application	Chipbreaker	Features	Cross section of the chipbreakers
Finishing machining	F1T	Finish machining. Very good chip control at small cutting depth.	
	PB1	General purpose finish geometry. Good stability.	
Semi-finishing machining	M1T	Big positive rake angle, low cutting force, suitable for different cutting depth.	
	PB3	First choice for steel semi-finishing turning, can be used in profile turning with different cutting depth, and offer excellent chip control.	
	M2T	Designed for low cutting force, combined strengthened cutting edge. Suitable for medium turning with big cutting depth.	
	PC3	2 nd choice for steel semi-finish turning.	
Medium machining	PD3	Guaranteed stability, stronger cutting edge can be used in interrupt turning.	
	M3T	Smooth rake surface, suitable for medium turning with big feed rate.	
	PC4	Reduced cutting force, suitable for steel and cast iron general purpose machining.	
	PL5	Suitable for medium machining with low cutting force, big cutting depth. Suitable for long shaft turning.	
Profiling	BS	Suitable for profile turning with changing cutting depth. Smooth chip evacuation.	



Application	Chipbreaker	Features	Cross section of the chipbreakers
Finishing machining	F1T	Low cutting force, excellent chip control	
	PB1	General purpose geometry for finish machining with good stability.	
Semi-finishing machining	PC2	1 st choice for semi-finish turning. Good edge strength and chip control.	
	M2T	Designed for high feed turning with smooth chip evacuation.	
	KC2	Big chip breaker design, suitable for machining with big cutting depth.	

Case study

Insert	TNMG 160404R-M1T AT202
Workpiece	Connecting Bar parts 
Machining materials	45#
Cutting speed	180m/min
Feed	0.31mm/rev
Cutting depth	1.50mm
Cooling	Emulsion
Result	 AT202 reached 31% longer tool life.

Insert	TNMG 160404E-PB1 AT202
Workpiece	Hydraulic Pipe Fitting parts 
Machining materials	45#
Cutting speed	400m/min
Feed	0.10mm/rev
Cutting depth	0.20mm
Cooling	Emulsion
Result	 AT202 combined PB1 geometry offered longer tool life and smooth chip evacuation.

Insert	TNMG 160404E-PB1 AT202
Workpiece	Shaft sleeve parts 
Machining materials	20CrMo (Tempered)
Cutting speed	94m/min
Feed	0.20mm/rev
Cutting depth	0.20mm
Cooling	Emulsion
Result	 AT202 reached the same tool life, but with less tool wear.



Insert	VNMG160404E-M3T AT202
Workpiece	Hydraulic Pipe Fitting parts 
Machining materials	35#, 45#
Cutting speed	160m/min
Feed	0.16mm/rev
Cutting depth	0.70mm
Cooling	Emulsion
Result	 AT202 reached 11% longer tool life, excellent surface finish.



◆ **Product list**

Insert	Product code	Dimmension(mm)				Grade
		d	s	d1	r	
	CNMG 120404E-PB1	12.7	4.76	5.16	0.4	•
	120408E-PB1	12.7	4.76	5.16	0.8	•
	CNMG 120404E-PB3	12.7	4.76	5.16	0.4	•
	120408E-PB3	12.7	4.76	5.16	0.8	•
	120412E-PB3	12.7	4.76	5.16	1.2	•
	CNMG 120404E-PC3	12.7	4.76	5.16	0.4	•
	120408E-PC3	12.7	4.76	5.16	0.8	•
	120412E-PC3	12.7	4.76	5.16	1.2	•
	CNMG 120404E-PD3	12.7	4.76	5.16	0.4	•
	120408E-PD3	12.7	4.76	5.16	0.8	•
	120412E-PD3	12.7	4.76	5.16	1.2	•
	DNMG 110404E-PB1	9.525	4.76	3.81	0.4	•
	150404E-PB1	12.7	4.76	5.16	0.4	•
	150408E-PB1	12.7	4.76	5.16	0.8	•
	150604E-PB1	12.7	6.35	5.16	0.4	•
	150608E-PB1	12.7	6.35	5.16	0.8	•
	DNMG 150404E-PB3	12.7	4.76	5.16	0.4	•
	150408E-PB3	12.7	4.76	5.16	0.8	•
	150412E-PB3	12.7	4.76	5.16	1.2	•
	150604E-PB3	12.7	6.35	5.16	0.4	•
	150608E-PB3	12.7	6.35	5.16	0.8	•
	150612E-PB3	12.7	6.35	5.16	1.2	•
	150612E-PB3	12.7	6.35	5.16	1.2	•
	DNMG 150404R-M1T	12.7	4.76	5.16	0.4	•
	150404L-M1T	12.7	4.76	5.16	0.4	•
	150404E-PC3	12.7	4.76	5.16	0.4	•
	150408E-PC3	12.7	4.76	5.16	0.8	•
	150412E-PC3	12.7	4.76	5.16	1.2	•
	150604E-PC3	12.7	6.35	5.16	0.4	•
	150608E-PC3	12.7	6.35	5.16	0.8	•
	150612E-PC3	12.7	6.35	5.16	1.2	•
	150612E-PC3	12.7	6.35	5.16	1.2	•

Insert	Product code	Dimmension(mm)				Grade
		d	s	d1	r	
	DNMG 110404E-PD3	9.525	4.76	3.81	0.4	•
	110408E-PD3	9.525	4.76	3.81	0.8	•
	150404E-PD3	12.7	4.76	5.16	0.4	•
	150408E-PD3	12.7	4.76	5.16	0.8	•
	DNMG 150404E-PC4	12.7	4.76	5.16	0.4	•
	150408E-PC4	12.7	4.76	5.16	0.8	•
	150604E-PC4	12.7	6.35	5.16	0.4	•
	150608E-PC4	12.7	6.35	5.16	0.8	•
	SNMG 120404E-PB1	12.7	4.76	5.16	0.4	•
	120408E-PB1	12.7	4.76	5.16	0.8	•
	SNMG 120404E-PC3	12.7	4.76	5.16	0.4	•
	120408E-PC3	12.7	4.76	5.16	0.8	•
	120412E-PC3	12.7	4.76	5.16	1.2	•
	SNMG 120404E-PD3	12.7	4.76	5.16	0.4	•
	120408E-PD3	12.7	4.76	5.16	0.8	•
	120412E-PD3	12.7	4.76	5.16	1.2	•
	120412E-PD3	12.7	4.76	5.16	1.2	•
	SNMG 120404-M3T	12.7	4.76	5.16	0.4	•
	120408-M3T	12.7	4.76	5.16	0.8	•
	SNMG 120404E-PC4	12.7	4.76	5.16	0.4	•
	120408E-PC4	12.7	4.76	5.16	0.8	•
	120412E-PC4	12.7	4.76	5.16	1.2	•
	TNMG 160404E-PB1	9.525	4.76	3.81	0.4	•
	160408E-PB1	9.525	4.76	3.81	0.8	•
	160412E-PB1	9.525	4.76	3.81	1.2	•
	TNMG 160404R-M1T	9.525	4.76	3.81	0.4	•
	160404L-M1T	9.525	4.76	3.81	0.4	•
	TNMG 160404E-PB3	9.525	4.76	3.81	0.4	•
	160408E-PB3	9.525	4.76	3.81	0.8	•
	160412E-PB3	9.525	4.76	3.81	1.2	•
	TNMG 160404R-M2T	9.525	4.76	3.81	0.8	•
	160404L-M2T	9.525	4.76	3.81	0.8	•


◆ **Product list**

Insert	Product code	Dimension(mm)				Grade
		d	s	d1	r	
	TNMG 160404E-PC3	9.525	4.76	3.81	0.4	•
	160408E-PC3	9.525	4.76	3.81	0.8	•
	160412E-PC3	9.525	4.76	3.81	1.2	•
	TNMG 160404E-PD3	9.525	4.76	3.81	0.4	•
	160408E-PD3	9.525	4.76	3.81	0.8	•
	160412E-PD3	9.525	4.76	3.81	1.2	•
	TNMG 160404R-PL5	9.525	4.76	3.81	0.4	•
	160408R-PL5	9.525	4.76	3.81	0.8	•
	160404L-PL5	9.525	4.76	3.81	0.4	•
	160408L-PL5	9.525	4.76	3.81	0.8	•
	TNMG 160404E-PC4	9.525	4.76	3.81	0.4	•
	160408E-PC4	9.525	4.76	3.81	0.8	•
	160412E-PC4	9.525	4.76	3.81	1.2	•
	VNMG 160404E-PB1	9.525	4.76	3.81	0.4	•
	160408E-PB1	9.525	4.76	3.81	0.8	•
	VNMG 160404E-PB3	9.525	4.76	3.81	0.4	•
	160408E-PB3	9.525	4.76	3.81	0.8	•
	160412E-PB3	9.525	4.76	3.81	1.2	•
	VNMG 160404E-PC3	9.525	4.76	3.81	0.4	•
	160408E-PC3	9.525	4.76	3.81	0.8	•
	160412E-PC3	9.525	4.76	3.81	1.2	•
	VNMG 160404E-PD3	9.525	4.76	3.81	0.4	•
	160408E-PD3	9.525	4.76	3.81	0.8	•
	160412E-PD3	9.525	4.76	3.81	1.2	•

Insert	Product code	Dimension(mm)				Grade
		d	s	d1	r	
	VNMG 160404-M3T	9.525	4.76	3.81	0.4	•
	160408-M3T	9.525	4.76	3.81	0.8	•
	VNMG 160404E-PC4	9.525	4.76	3.81	0.4	•
	160408E-PC4	9.525	4.76	3.81	0.8	•
	160412E-PC4	9.525	4.76	3.81	1.2	•
	VNMG 160404E-BS	9.525	4.76	3.81	0.4	○
	160408E-BS	9.525	4.76	3.81	0.8	○
	WNMG 080404-F1T	9.525	4.76	5.16	0.4	•
	080408-F1T	9.525	4.76	5.16	0.8	•
	WNMG 080404E-PB1	12.7	4.76	5.16	0.4	•
	080408E-PB1	12.7	4.76	5.16	0.8	•
	080412E-PB1	12.7	4.76	5.16	1.2	•
	WNMG 080404E-PB3	12.7	4.76	5.16	0.4	•
	080408E-PB3	12.7	4.76	5.16	0.8	•
	080412E-PB3	12.7	4.76	5.16	1.2	•
	WNMG 080404E-PC3	12.7	4.76	5.16	0.4	•
	080408E-PC3	12.7	4.76	5.16	0.8	•
	080412E-PC3	12.7	4.76	5.16	1.2	•
	WNMG 080404E-PD3	12.7	4.76	5.16	0.4	•
	080408E-PD3	12.7	4.76	5.16	0.8	•
	080412E-PD3	12.7	4.76	5.16	1.2	•
	WNMG 080404-M3T	9.525	4.76	5.16	0.4	•
	080408-M3T	9.525	4.76	5.16	0.8	•
	WNMG 080404E-PC4	12.7	4.76	5.16	0.4	•
	080408E-PC4	12.7	4.76	5.16	0.8	•
	080412E-PC4	12.7	4.76	5.16	1.2	•

● **Product list**

Insert	Product code	Dimension(mm)				Grade
		d	s	d1	r	
	CCMT 060202-F1T	6.35	2.38	2.8	0.2	•
	060204-F1T	6.35	2.38	2.8	0.4	•
	CCMT 060202E-PB1	6.35	2.38	2.8	0.2	•
	060204E-PB1	6.35	2.38	2.8	0.4	•
	060208E-PB1	6.35	2.38	2.8	0.8	•
	09T302E-PB1	9.525	3.97	4.4	0.2	•
	09T304E-PB1	9.525	3.97	4.4	0.4	•
	09T308E-PB1	9.525	3.97	4.4	0.8	•
	CCMT 060204E-PC2	6.35	2.38	2.8	0.4	•
	060208E-PC2	6.35	2.38	2.8	0.8	•
	09T304E-PC2	9.525	3.97	4.4	0.4	•
	09T308E-PC2	9.525	3.97	4.4	0.8	•
	120404E-PC2	12.7	4.76	5.5	0.4	•
	120408E-PC2	12.7	4.76	5.5	0.8	•
	120412E-PC2	12.7	4.76	5.5	1.2	•
	CCMT 09T304-M2T	9.525	3.97	4.4	0.4	•
	09T308-M2T	9.525	3.97	4.4	0.8	•
	CCMT 060204E-KC2	6.35	2.38	2.8	0.4	•
	060208E-KC2	6.35	2.38	2.8	0.8	•
	09T304E-KC2	9.525	3.97	4.4	0.4	•
	09T308E-KC2	9.525	3.97	4.4	0.8	•
	120404E-KC2	12.7	4.76	5.5	0.4	•
	120408E-KC2	12.7	4.76	5.5	0.8	•
	120412E-KC2	12.7	4.76	5.5	1.2	•
	DCMT 070202-F1T	6.35	2.38	2.8	0.2	•
	070204-F1T	6.35	2.38	2.8	0.4	•
	DCMT 11T302-F1T	6.35	2.38	4.4	0.4	○
	11T304-F1T	9.525	3.97	4.4	0.4	•
	11T308-F1T	9.525	3.97	4.4	0.8	•

Insert	Product code	Dimension(mm)				Grade
		d	s	d1	r	
	DCMT 070202E-PB1	6.35	2.38	2.8	0.2	•
	070204E-PB1	6.35	2.38	2.8	0.4	•
	11T302E-PB1	9.525	3.97	4.4	0.2	•
	11T304E-PB1	9.525	3.97	4.4	0.4	•
	11T308E-PB1	9.525	3.97	4.4	0.8	•
	DCMT 070204E-PC2	6.35	2.38	2.8	0.4	•
	070208E-PC2	6.35	2.38	2.8	0.8	•
	11T304E-PC2	9.525	3.97	4.4	0.4	•
	11T308E-PC2	9.525	3.97	4.4	0.8	•
	11T312E-PC2	9.525	3.97	4.4	1.2	•
	DCMT 11T304-M2T	9.525	3.97	4.4	0.4	•
	11T308-M2T	9.525	3.97	4.4	0.8	•
	DCMT 070204E-KC2	6.35	2.38	2.8	0.4	•
	070208E-KC2	6.35	2.38	2.8	0.8	•
	11T304E-KC2	9.525	3.97	4.4	0.4	•
	11T308E-KC2	9.525	3.97	4.4	0.8	•
	SCMT 09T304E-PB1	9.525	3.97	4.4	0.4	•
	09T308E-PB1	9.525	3.97	4.4	0.8	•
	SCMT 09T304E-PC2	9.525	3.97	4.4	0.4	•
	09T308E-PC2	9.525	3.97	4.4	0.8	•
	120404E-PC2	12.7	4.76	5.5	0.4	•
	120408E-PC2	12.7	4.76	5.5	0.8	•
	SCMT 09T304-M2T	9.525	3.97	4.4	0.4	•
	09T308-M2T	9.525	3.97	4.4	0.8	•
	SCMT 09T304E-KC2	9.525	3.97	4.4	0.4	•
	09T308E-KC2	9.525	3.97	4.4	0.8	•
	120404E-KC2	12.7	4.76	5.5	0.4	•
	120408E-KC2	12.7	4.76	5.5	0.8	•

Product list

Insert	Product code	Dimension(mm)				Grade
		d	s	d1	r	
	TCMT 090204E-PB1	5.56	2.38	2.5	0.4	•
	110202E-PB1	6.35	2.38	2.8	0.2	•
	110204E-PB1	6.35	2.38	2.8	0.4	•
	110208E-PB1	6.35	2.38	2.8	0.8	•
	16T304E-PB1	9.525	3.97	4.4	0.4	•
	16T308E-PB1	9.525	3.97	4.4	0.8	•
	TCMT 090204E-PC2	5.56	2.38	2.5	0.4	•
	090208E-PC2	5.56	2.38	2.5	0.8	•
	110204E-PC2	6.35	2.38	2.8	0.4	•
	110208E-PC2	6.35	2.38	2.8	0.8	•
	16T304E-PC2	9.525	3.97	4.4	0.4	•
	16T308E-PC2	9.525	3.97	4.4	0.8	•
	TCMT 110204-M2T	6.35	2.38	2.8	0.4	•
	110208-M2T	6.35	2.38	2.8	0.8	•
	TCMT 16T304-M2T	6.35	2.38	4.4	0.4	•
	16T308-M2T	6.35	2.38	4.4	0.8	•

Insert	Product code	Dimension(mm)				Grade
		d	s	d1	r	
	TCMT 090204E-KC2	5.56	2.38	2.5	0.4	•
	090208E-KC2	5.56	2.38	2.5	0.8	•
	110204E-KC2	6.35	2.38	2.8	0.4	•
	110208E-KC2	6.35	2.38	2.8	0.8	•
	16T304E-KC2	9.525	3.97	4.4	0.4	•
	16T308E-KC2	9.525	3.97	4.4	0.8	•
	TPMT 090204E-PC2	5.56	2.38	2.5	0.4	•
	090208E-PC2	5.56	2.38	2.5	0.8	•
	110304E-PC2	6.35	3.97	3.4	0.4	•
	110308E-PC2	6.35	3.97	3.4	0.8	•
	VBMT 110302E-PB1	6.35	3.18	2.8	0.4	•
	110304E-PB1	6.35	3.18	2.8	0.4	•
	110308E-PB1	6.35	3.18	2.8	0.8	•
	160404E-PB1	9.525	4.76	4.4	0.4	•
	160408E-PB1	9.525	4.76	4.4	0.8	•
	VBMT 110304E-PC2	6.35	3.18	2.8	0.4	•
	110308E-PC2	6.35	3.18	2.8	0.8	•
	160404E-PC2	9.525	4.76	4.4	0.4	•
	160408E-PC2	9.525	4.76	4.4	0.8	•
	VBMT 160404E-KC2	9.525	4.76	4.4	0.4	•
	160408E-KC2	9.525	4.76	4.4	0.8	•
	160412E-KC2	9.525	4.76	4.4	1.2	•